




Air Control Industries

radial blower RB125

Single Inlet Centrifugal Blowers

ACI - Effective Air is our Business

Discharge Angles / Outline Dimensions:

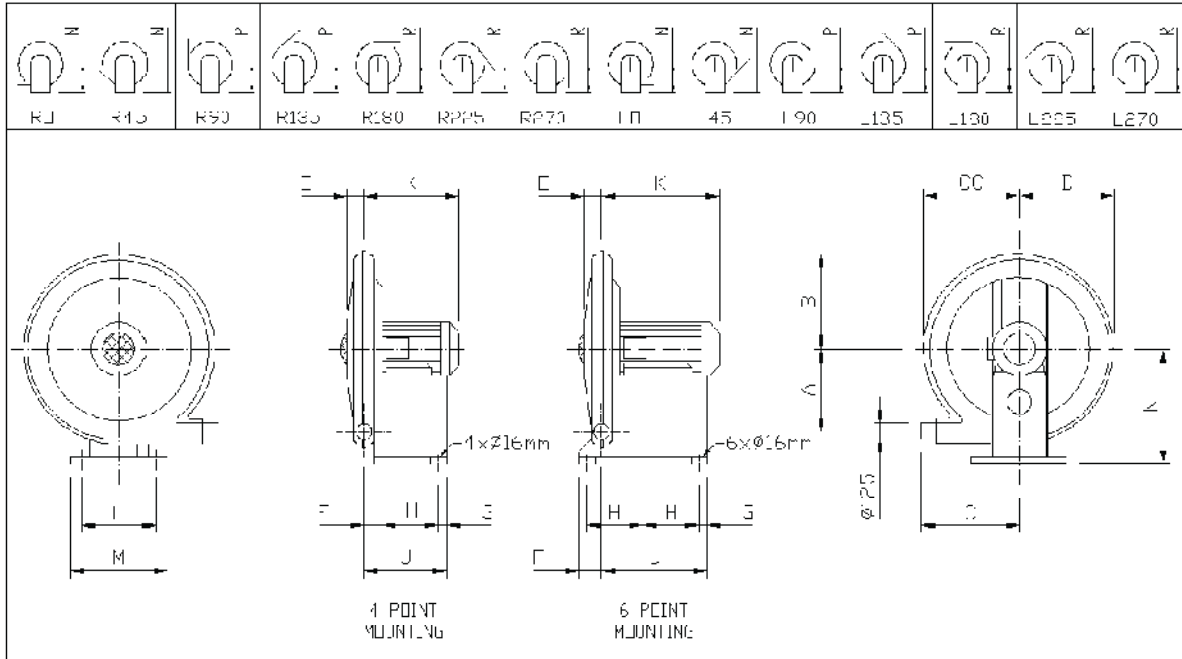

Type	Motor kW	Mtg Pts.	A	B	C	CC	D	E	F	G	H	J	K	L	M	N	P	R	Kg	Enc. Type
4012.5	3	6	286	305	280	280	330	60	111	32	181	315	372	311	356	435	435	435	60	2
4012.5	4	6	286	305	280	280	330	60	111	32	181	315	393	311	356	435	435	435	69	2
4812.5	4	6	324	343	305	318	368	60	111	32	181	315	393	311	356	464	464	464	80	2
4812.5	5.5	6	324	343	305	318	368	60	111	32	200	353	441	362	406	464	464	464	93	2
5612.5	4	6	362	381	339	355	406	60	111	32	181	315	393	311	356	502	502	502	91	2
5612.5	5.5	6	362	381	339	355	406	60	111	32	200	353	441	362	406	502	502	502	104	2
5612.5	7.5	6	362	381	339	355	406	60	111	32	200	353	441	362	406	502	502	502	104	2
6112.5	5.5	6	387	406	375	381	432	60	111	32	200	353	441	362	406	527	527	527	111	2
6112.5	7.5	6	387	406	375	381	432	60	111	32	200	353	441	362	406	527	527	527	111	2
6112.5	11	6	387	406	375	381	432	60	111	32	251	455	572	425	470	527	527	527	153	2
6612.5	7.5	6	413	432	390	406	457	60	111	32	200	353	441	362	406	552	552	552	122	2
6612.5	11	6	413	432	390	406	457	60	111	32	251	455	572	425	470	552	552	552	164	2
7112.5	7.5	6	438	457	416	432	482	60	111	32	200	353	441	362	406	578	578	578	133	2
7112.5	11	6	438	457	416	432	482	60	111	32	251	455	572	425	470	578	578	578	175	2
7112.5	15	6	438	457	416	432	482	60	111	32	271	455	572	425	470	578	578	578	175	2
7612.5	11	6	464	483	430	457	508	60	111	32	251	455	572	425	470	603	603	603	187	2
7612.5	15	6	464	483	430	457	508	60	111	32	251	455	572	425	470	603	603	603	187	2
325	15	6	489	492	467	467	518	90	110	32	250	454	560	426	470	629	540	515	200	2
325	18.5	6	489	492	467	467	518	90	110	32	269	492	560	426	470	629	540	515	219	2
345	18.5	6	514	518	492	492	543	90	110	32	269	492	560	426	470	655	565	540	232	2
345	22	6	514	518	492	492	543	90	110	32	269	492	626	490	534	655	565	540	259	2
365	18.5	6	540	543	518	518	568	90	110	32	269	492	560	426	470	680	590	565	246	2
365	22	6	540	543	518	518	568	90	110	32	269	492	626	490	534	680	590	565	273	2
365	30	6	540	543	518	518	568	90	110	32	307	568	705	490	534	680	590	565	335	2

Note: Enclosure Types are as follows:

- 1 = Enclosure not required as noise level below 80dB(A) with Inlet Filter Silencer
- 2 = Enclosure type 1200 required
- 3 = Enclosure type 1500 required

Please note (1) - all drawings measurements are in millimeters (mm)
 Please note (2) - above technical specifications are subject to change

AIR CONTROL INDUSTRIES LTD.

Weycroft Avenue, Millwey Industrial Estate, Axminster, EX13 5HU
 Tel: 0845 5000 501, Fax: 0845 5000 502

AIR CONTROL INDUSTRIES INC.

76 Augusta Rockland Road, Windsor, ME 04363, USA
 Tel: 207-445-2518, Fax: 207-445-2497

www.aircontrolindustries.com/ sales@aircontrolindustries.com

Ref: RB125 Iss 10/1



Certificate No. FM20497




Air Control Industries

radial blower RB125

Single Inlet Centrifugal Blowers

ACI - Effective Air is our Business

Performance details:

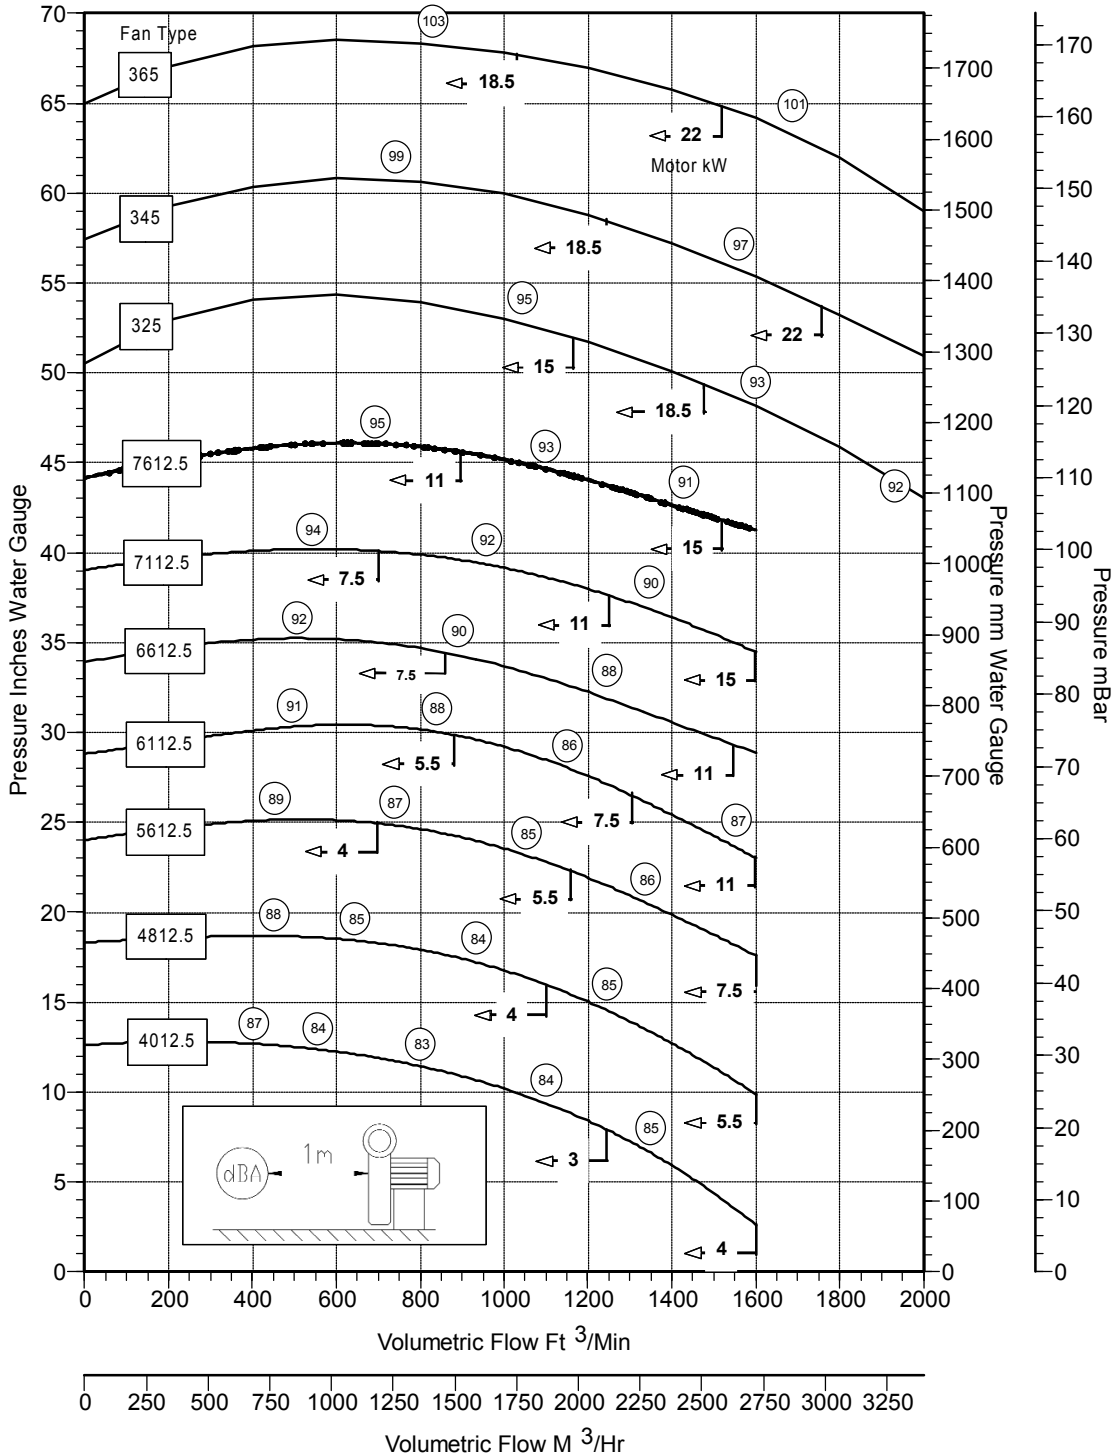

AIR CONTROL INDUSTRIES LTD.
Weycroft Avenue, Millwey Industrial Estate, Axminster, EX13 5HU
Tel: 0845 5000 501, Fax: 0845 5000 502

AIR CONTROL INDUSTRIES INC.
76 Augusta Rockland Road, Windsor, ME 04363, USA
Tel: 207-445-2518, Fax: 207-445-2497

www.aircontrolindustries.com / sales@aircontrolindustries.com

Ref: RB125 Iss 10/1



Certificate No. FM20497