



Performance details:

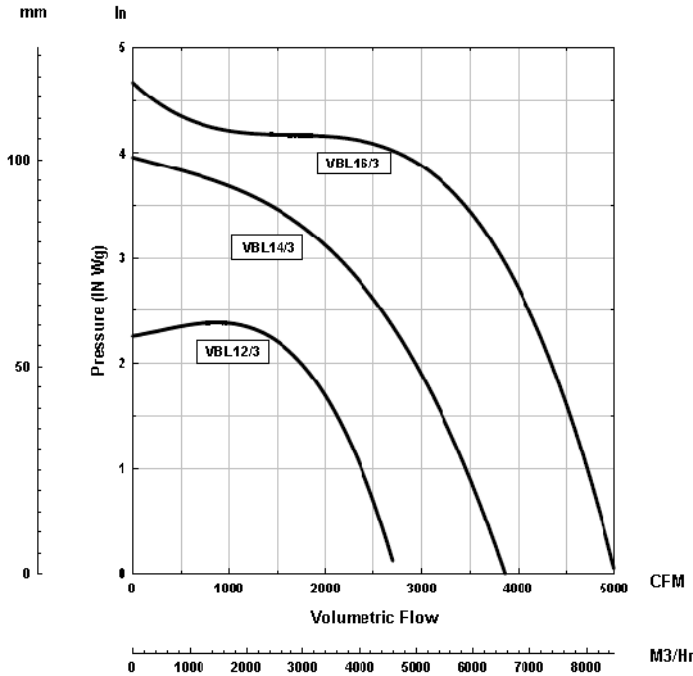

Motor type:	External rotor motor, thermally protected IP42
Nominal supply:	400V 3Ph 50/60Hz
Standard ancillaries:	Inlet and discharge guards
Materials:	Fan case: fabricated sheet steel Impeller: galvanised sheet steel
Finishes:	Powder coated
Mounting:	Flange fitted with mounting feet, suitable for any orientation
Noise levels:	80.0 dB(A) Free Air, 1 metre
Weight:	IO on request

Outline dimensions:

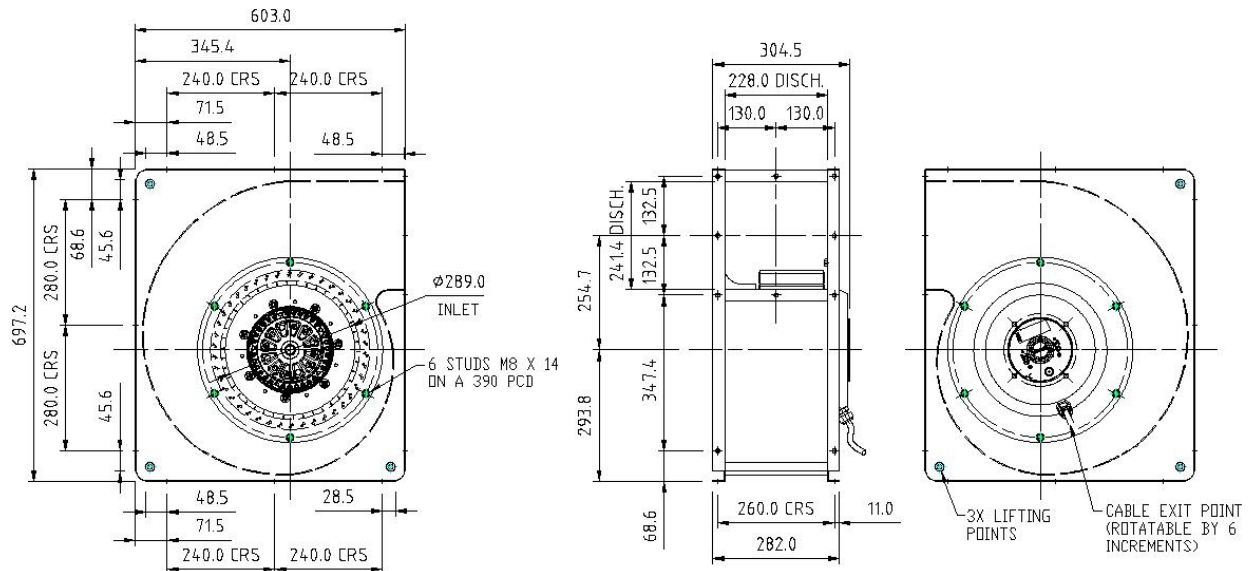

Fan Type	A	A1	A2	A3	A4	B	BI	B2	B3	B4	C	CI	C2	C3	C4	D	DI	D2	D3	D4	D5	I	S
VBL12/3	527.1	301.9	62.3	210.0	40.4	612.5	352.5	59.7	245.0	36.7	273.2	203.0	117.5	11.0	279.5	256.8	210.8	120.0	222.4	59.2	300.0	257.0	350.0
VBL14/3	603.0	345.4	71.5	240.0	48.5	697.2	403.4	68.6	280.0	45.6	304.5	228.0	130.0	11.0	303.5	293.8	241.4	132.5	254.7	68.6	347.4	289.0	390.0
VBL16/3	678.9	388.9	69.4	270.0	46.4	781.9	451.1	75.9	315.0	52.9	309.0	255.0	143.5	11.0	390.5	330.8	272.0	150.0	287.0	77.8	390.0	325.0	430.0

Please note (1) - all drawings measurements are in millimeters (mm)
Please note (2) - above technical specifications are subject to change

AIR CONTROL INDUSTRIES LTD.
 Silver Street, Chard, Somerset, UK, TA20 2AE
 Tel: 0845 5000 501, Fax: 0845 5000 502

AIR CONTROL INDUSTRIES INC.
 195 Augusta Rockland Road, Windsor, Maine, USA
 Tel: 207-445-2518

www.aircontrolindustries.com/ / sales@aircontrolindustries.com

Ref: Slimline VBL12,14,16/3 Iss 10/1



Certificate No. FM20497