


Double stage Lateral Channel Blowers Compressor - 50Hz X2.35 SM

Air Control Industries
Global Air Movement Specialists since 1969



Main Features


- Compliance with the Machinery Directive 2006/42/CE
- Maximum flow: 354 m³/h
- Maximum Pressure: 625 mbar
- Aluminium alloy parts
- Motors manufactured in conformity to EN 60034-1 / IEC 60034-1
- Suitable for horizontal and vertical installation
- Inlet / Outlet ports: G4"

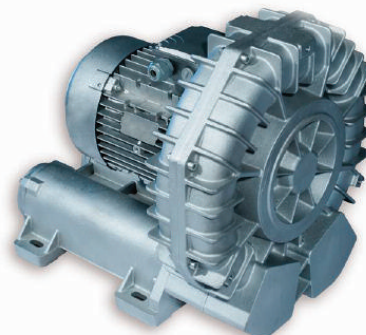


Technical Data for 50Hz - 2 poles - Three-Phase Motors [5]

Order Code	Maximum flow [m³/h]	Maximum Differential Pressure Δp [hPa]	Electric Motor data			Noise level Lp [3] [dB (A)]	Weight [kg]
			Installed Power [kW]	Voltage [2] Δ/Y [V]	Rated Amps Δ/Y [A]		
X2.35-5.5	354	350	5,5	400/690	10,8 / 6,2	80,5	72
X2.35-7.5	354	500	7,5	400/690	14,9 / 8,6	81,0	77
X2.35-9.2	354	600	9,2	400/690	18,0 / 10,4	81,5	98
X2.35-11.0	354	625	11,0	400/690	21,5 / 12,4	82,0	100

Performance Diagrams [50Hz] [1]

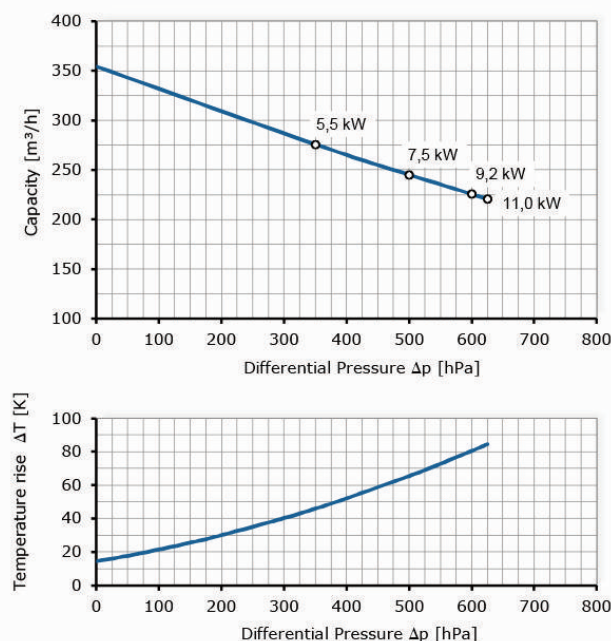

Overall Dimensions [mm] [4]

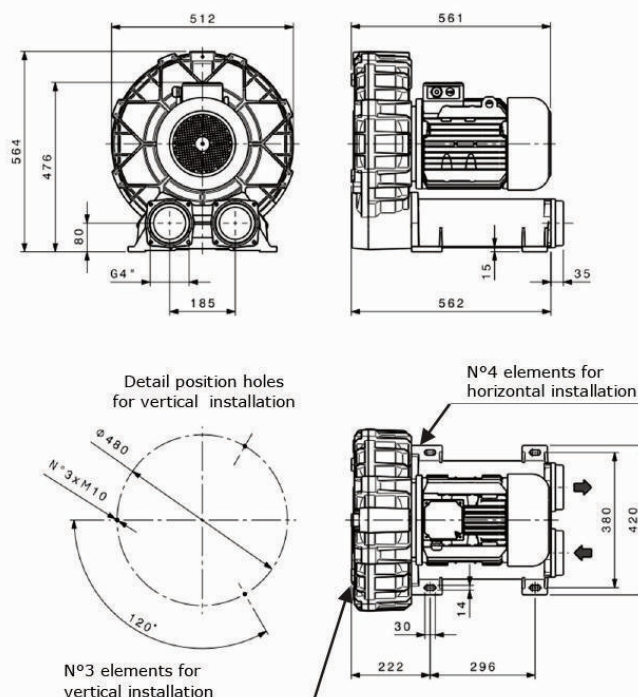

Notes:

- Performance curves refer to operative conditions to air at 15°C temperature and 1013 hPa (abs) pressure measured at inlet port. Tolerance on capacity and temperature values: +/-10%. 1 hPa = 1 mbar
- Allowed tolerance for supplied voltage: +/-10%.
- Noise measured at 1 meter distance in accordance to EN ISO 3744, tolerance: +/-3 dB (A).
- Tolerance about dimensions according to: ISO 2768-c.
- For use with frequencies different from 50Hz, refer to variable frequency table.

For proper installation and safe use of the blower it must be equipped with relief valve and air filter.
For further details ask for the Compressor connection diagram.

Data subject to change without prior notice.

Tel: ++44(0)1297 529242
www.aircontrolindustries.com