




HFM 133/52

Single Inlet Centrifugal Fan (2 pole)


General Characteristics:

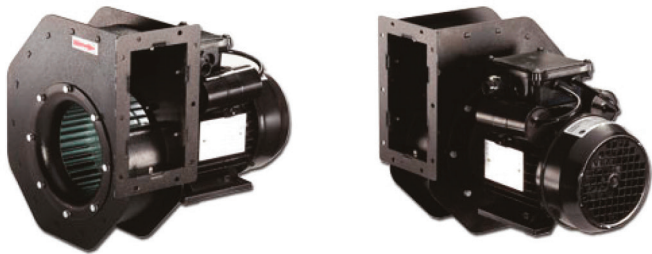

[Please note - image above may not be representative of the unit supplied]

Motor type:	Standard motors are IP54 or IP55. More available on request
Nominal supply:	220/240V or 115V, 1Ph, 50/60Hz Others available on request
Materials & Finishes:	Sheet steel and powder coated (standard finish in black) Options include Stainless Steel (304 or 316); Aluminum - unpainted or powder coated
Motor variations:	ATEX, CE, CSA, UL available on request
Noise levels (max):	73dB(A) Free Air, 1M

Performance Curves:

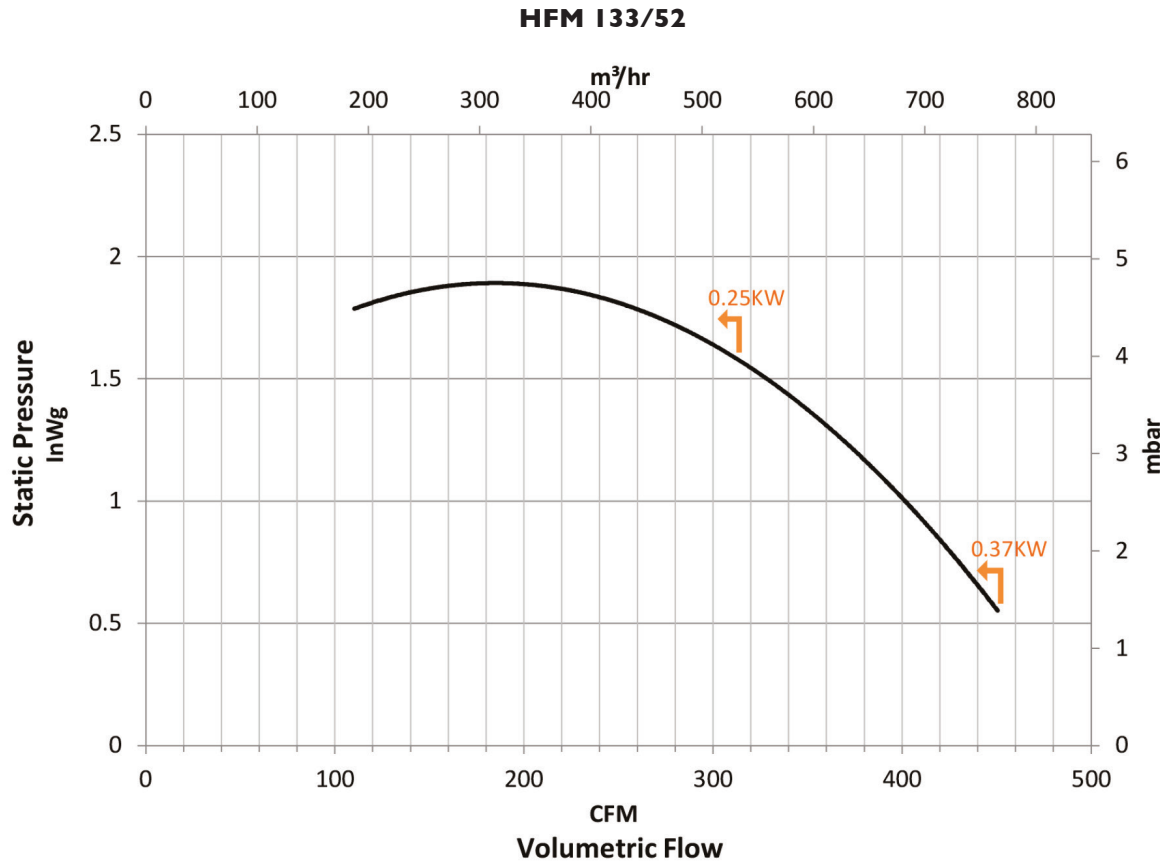


HFM 133/52

Single Inlet Centrifugal Fan (2 pole)

Outline Drawing:


		FAN								OPTIONAL PEDESTAL											INLET				WEIGHT	
Model	Power (kW)	A	B	C	D	E	F	G	H	J	J1	J2	K	L	M	M1	N	N1	P	P1	ØQ	R	R1	R2	R3	(KG)
HFM-133/52	0.25	275	249	114	69	63	93	272	43	105	75	44	112	100	317	170	270	130	27	27	11	160	155	107	M5	6.2
	71					133	303	9.0																		

[Note - Dimensions 'F' & 'G' may vary depending on motor style. Weights specified are for standard units with no accessories attached.]

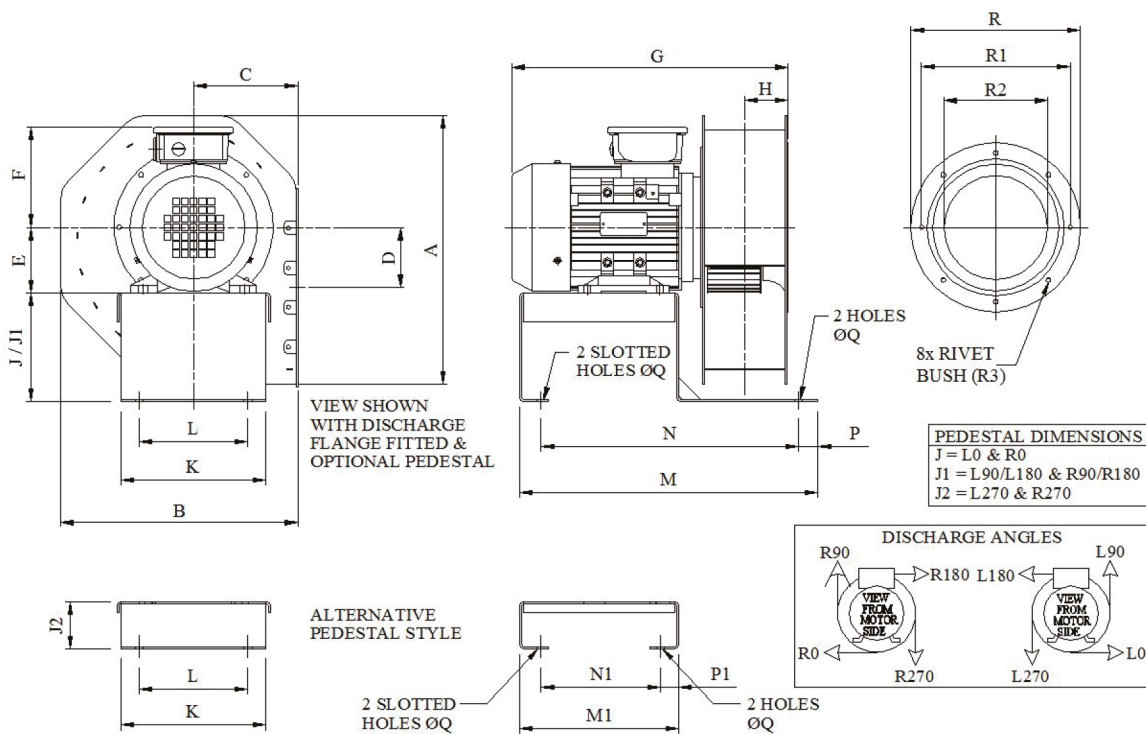

Accessories:

Model	DISCHARGE FLANGE								ØU	INLET SPIGOT		DISCHARGE SPIGOT		
	S	S1	S2	Sa	T	T1	T2	Ta		V	ØW	X	Y	ØZ
HFM-133/52	150	175	190	70	80	105	122	60	6	50	100	103	50	125

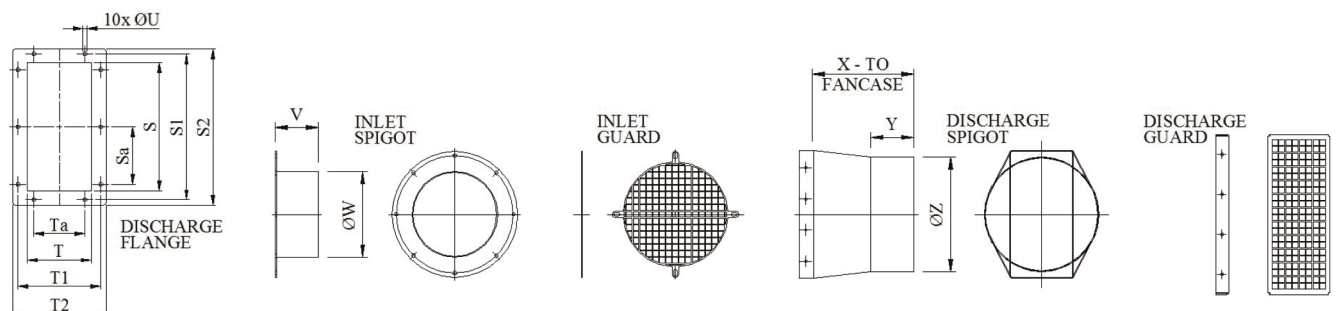

Please note(1) - all drawing measurements are millimetres

Please note(2) - above technical specifications may be subject to change

Please note(3) - image of fan may not be representative of the unit supplied