

HFM 225/92

Single Inlet Centrifugal Fan (2 pole)


General Characteristics:



Motor type:	Standard motors are IP54 or IP55. More available on request
Nominal supply:	220/240V or 115V, 1Ph, 50/60Hz Others available on request
Materials & Finishes:	Sheet steel and powder coated (standard finish in black) Options include Stainless Steel (304 or 316); Aluminum - unpainted or powder coated
Motor variations:	ATEX, CE, CSA, UL available on request
Noise levels (max):	86dB(A) Free Air, 1M

[Please note - image above may not be representative of the unit supplied]

Performance Curves:

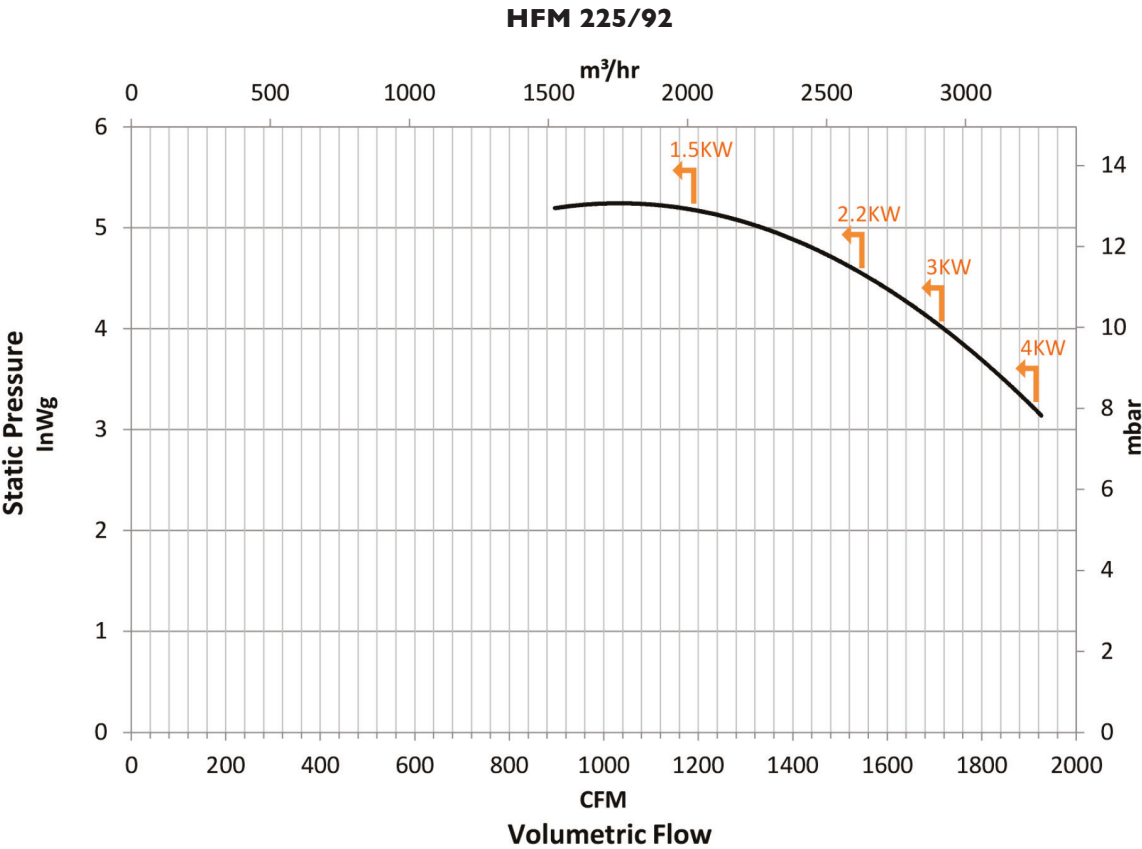


HFM 225/92

Single Inlet Centrifugal Fan (2 pole)

Outline Drawing:


		FAN								OPTIONAL PEDESTAL											INLET				WEIGHT	
Model	Power (kW)	A	B	C	D	E	F	G	H	J	J1	J2	K	L	M	M1	N	N1	P	P1	ØQ	R	R1	R2	R3	(KG)
HFM-225/92	1.5	462	399	173	109	90	143	425	73	195	145	84	260	200	522	300	470	250	27	25	13	280	255	180	M6	26.4
	2.2							450																		30.4
	3.0							488																		35.9
	4.0							500																		32.2

[Note - Dimensions 'F' & 'G' may vary depending on motor style. Weights specified are for standard units with no accessories attached.]

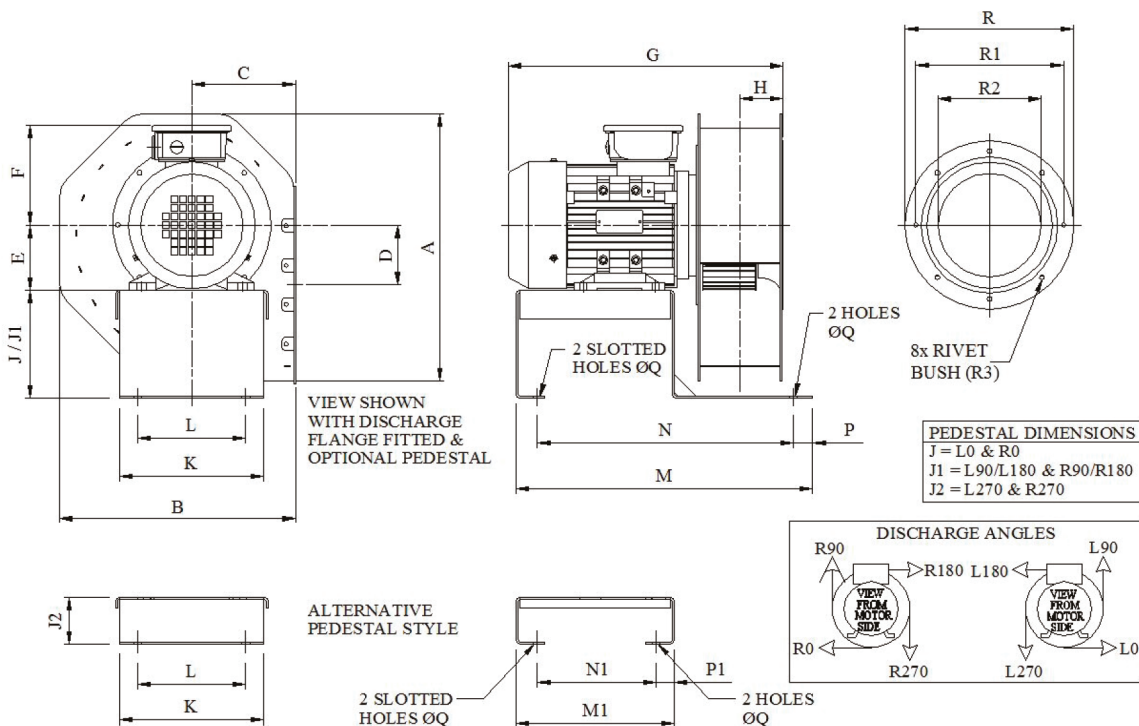

Accessories:

Model	DISCHARGE FLANGE									INLET SPIGOT		DISCHARGE SPIGOT		
	S	S1	S2	Sb	T	T1	T2	Tb	ØU	V	ØW	X	Y	ØZ
HFM-225/92	280	310	330	65	140	170	192	60	7	75	200	203	100	225

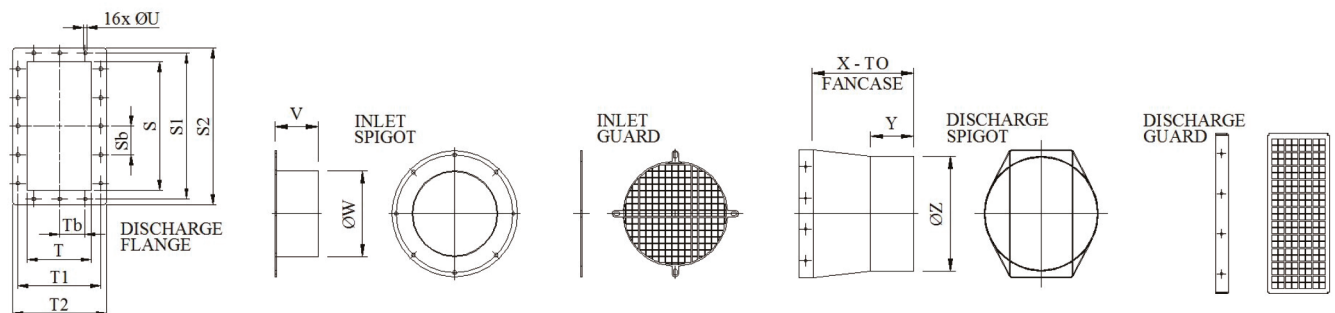

Please note(1) - all drawing measurements are millimetres

Please note(2) - above technical specifications may be subject to change

Please note(3) - image of fan may not be representative of the unit supplied