



HFM 250/102

Single Inlet Centrifugal Fan (2 pole)


General Characteristics:



Motor type:	Standard motors are IP54 or IP55. More available on request
Nominal supply:	220/240V or 115V, 1Ph, 50/60Hz Others available on request
Materials & Finishes:	Sheet steel and powder coated (standard finish in black) Options include Stainless Steel (304 or 316); Aluminum - unpainted or powder coated
Motor variations:	ATEX, CE, CSA, UL available on request
Noise levels (max):	92dB(A) Free Air, 1M

[Please note - image above may not be representative of the unit supplied]

Performance Curves:

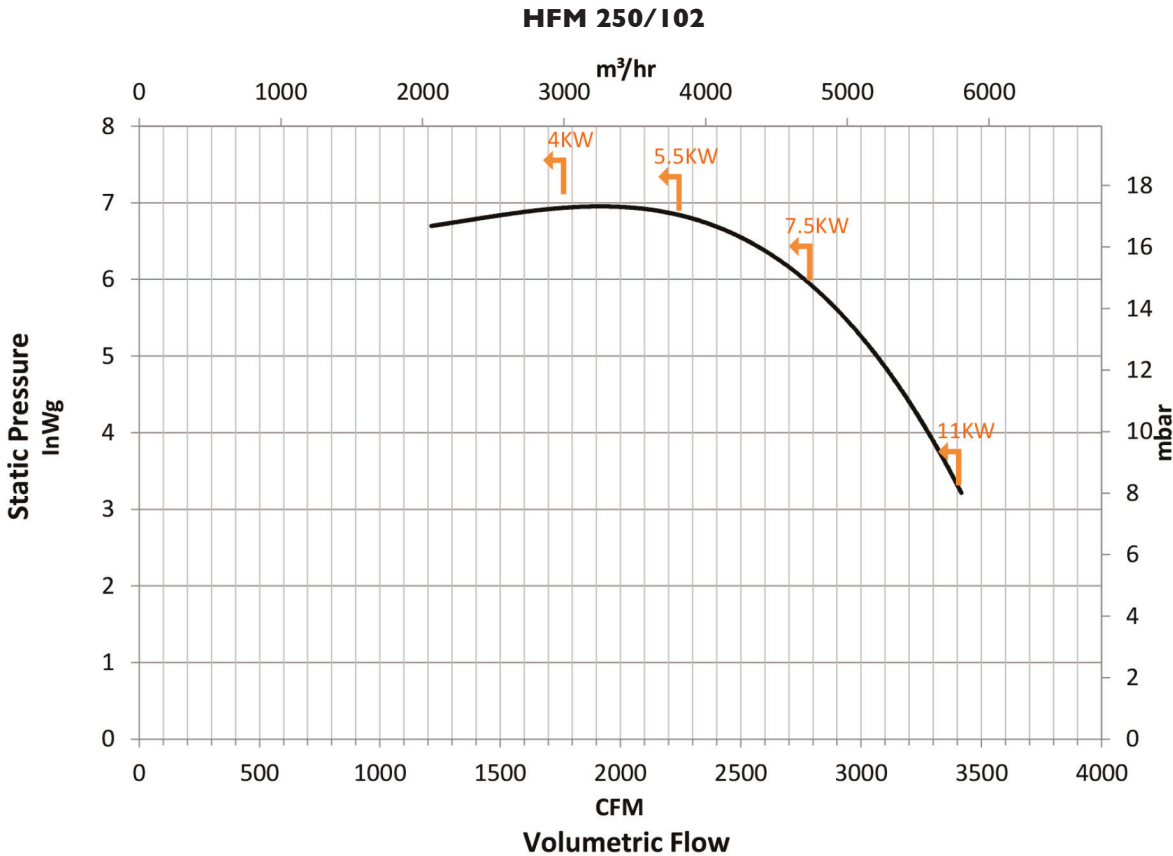


HFM 250/102

Single Inlet Centrifugal Fan (2 pole)

Outline Drawing:


Model	Power (kW)	FAN								OPTIONAL PEDESTAL										INLET				WEIGHT (KG)		
		A	B	C	D	E	F	G	H	J	J1	J2	K	L	M	M1	N	N1	P	P1	ØQ	R	R1		R2	R3
HFM-250/102	4.0	508	437	188	113	112	169	520	83	210	155	89	330	280	662	385	610	335	27	25	13	306	290	203	M8	41.0
	5.5					132	188	566																		54.1
	7.5					132	188	604																		59.6
	11.0					194	573	604																		69.6

[Note - Dimensions 'F' & 'G' may vary depending on motor style. Weights specified are for standard units with no accessories attached.]

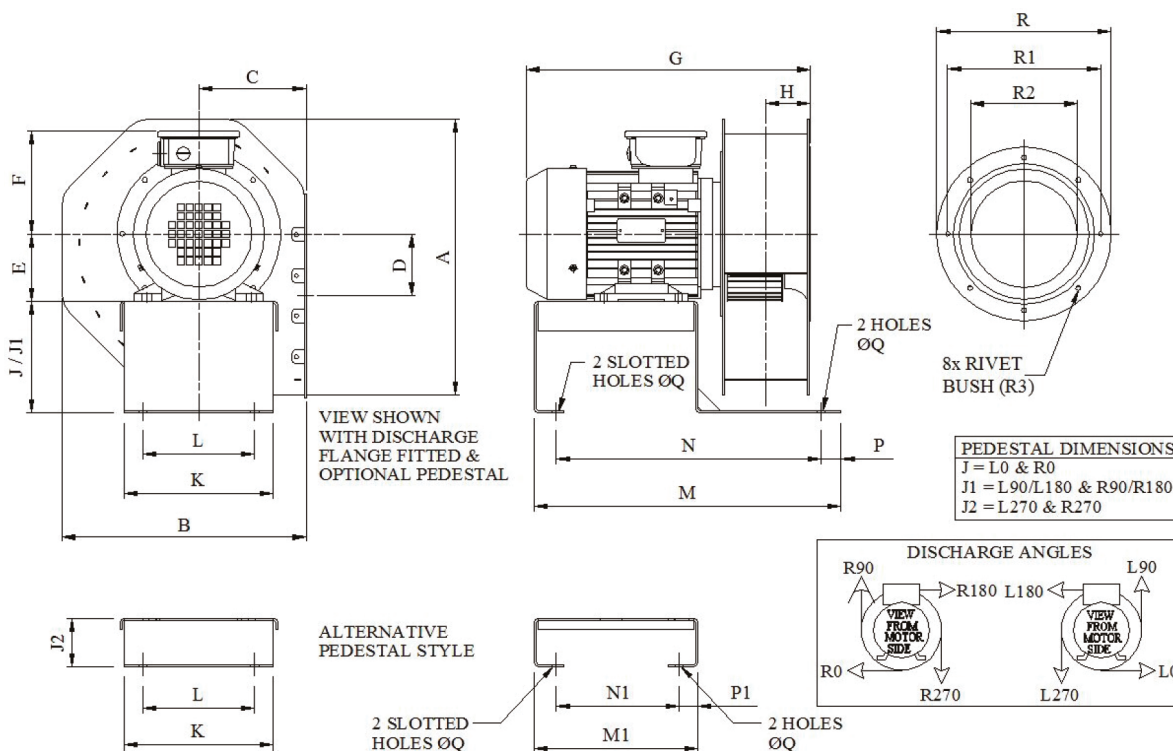

Accessories:

Model	DISCHARGE FLANGE								INLET SPIGOT		DISCHARGE SPIGOT			
	S	S1	S2	Sb	T	T1	T2	Tb	ØU	V	ØW	X	Y	ØZ
HFM-250/102	315	350	375	75	160	195	222	70	9	75	200	203	100	250

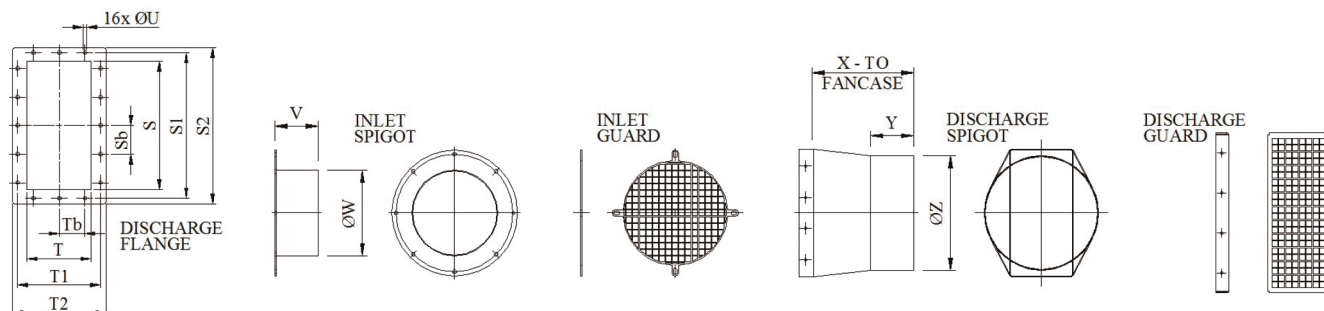

Please note(1) - all drawing measurements are millimetres
 Please note(2) - above technical specifications maybe subject to change
 Please note(3) - image of fan may not be representative of the unit supplied