

# EC Fan QBL6/3


## Single Inlet Centrifugal Fan

### General Characteristics:




[Please note - image above may not be representative of the unit supplied]

|                          |                                                                                                      |
|--------------------------|------------------------------------------------------------------------------------------------------|
| <b>Motor type:</b>       | EC (Electronically Commutated) motors<br>IP44<br>Integrated speed control via PWM or<br>0-10V signal |
| <b>Nominal supply:</b>   | 230V 1Ph 50/60Hz<br>115V 1Ph 50/60Hz                                                                 |
| <b>Options:</b>          | Potentiometer 0-10V speed controller; inlet<br>& discharge guards, spigots, inlet filters            |
| <b>Materials:</b>        | Fancase - cast aluminium LM6<br>Impeller - galvanised sheet steel                                    |
| <b>Finishes:</b>         | Unpainted or stove enamel as std (black)                                                             |
| <b>Mounting options:</b> | Inlet & discharge drillings                                                                          |
| <b>Noise levels:</b>     | 77.2dB(A) Free Air, 1 metre                                                                          |
| <b>Weight:</b>           | 4.0Kg/8.80Lbs                                                                                        |

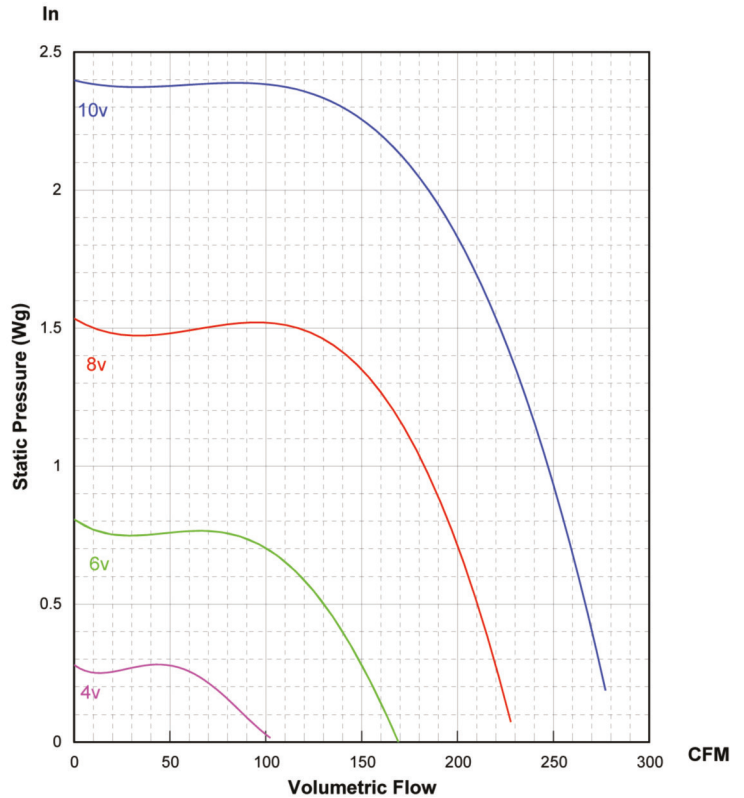

### Outline dimensions:

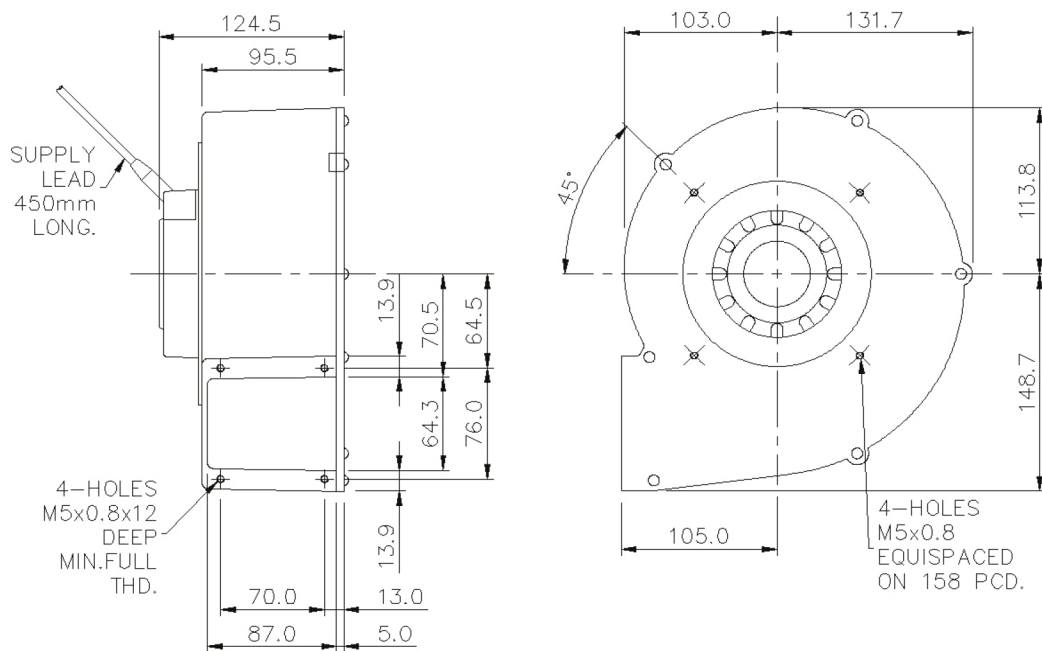

Please note (1) - all drawings measurements are in millimeters (mm)  
Please note (2) - above technical specifications are subject to change