


Centrifugal Fan MR280L

Single Inlet Centrifugal Fan (2 & 4 Pole)

General Characteristics:

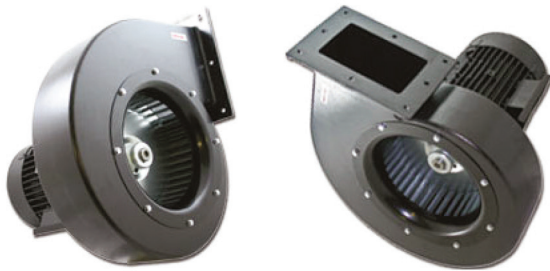

Motor type: Squirrel cage induction motor IP55 as std

Nominal supply: 380/420VY / 220/240VD 3Ph 50Hz
440/480VY / 250/280VD 3Ph 60Hz

Options: Inlet & discharge guards, Inlet filters, Spigots

Materials: Fancase: Cast aluminium LM6
Impellers: Galvanised sheet steel

Finishes: Unpainted/Stove enamel (black) as std

Mounting options: Motor feet or Pedestal



Noise levels: 95dB(A) Free Air, 1M

Weight: 37Kgs / 82Lbs

Motor variations: ATEX, CE, CSA, UL available


Outline dimensions:

[note: motor shown is for 50Hz performance.
Motor dimensions for 60Hz operation may vary]

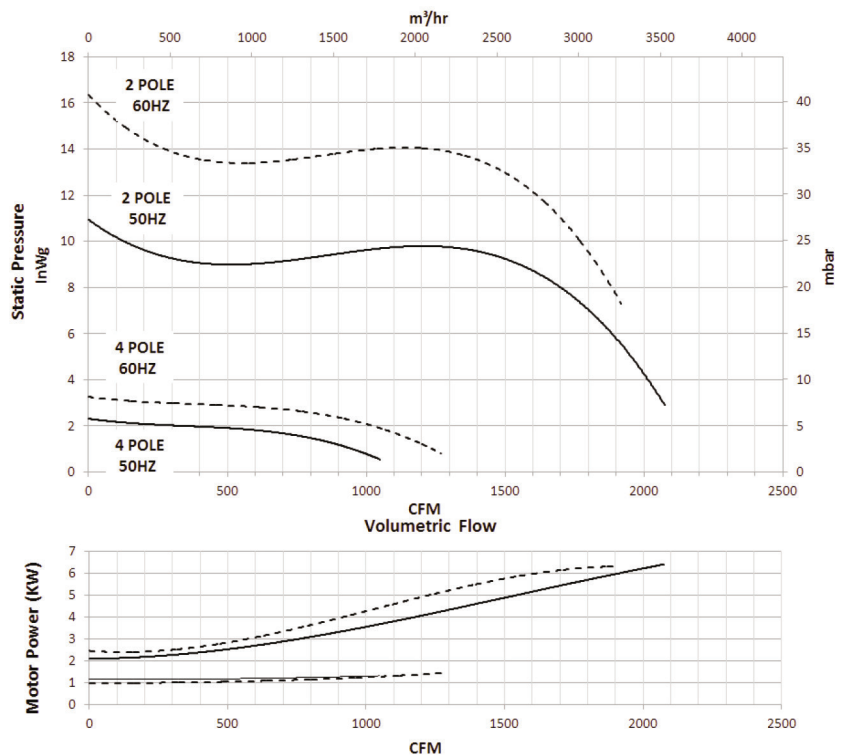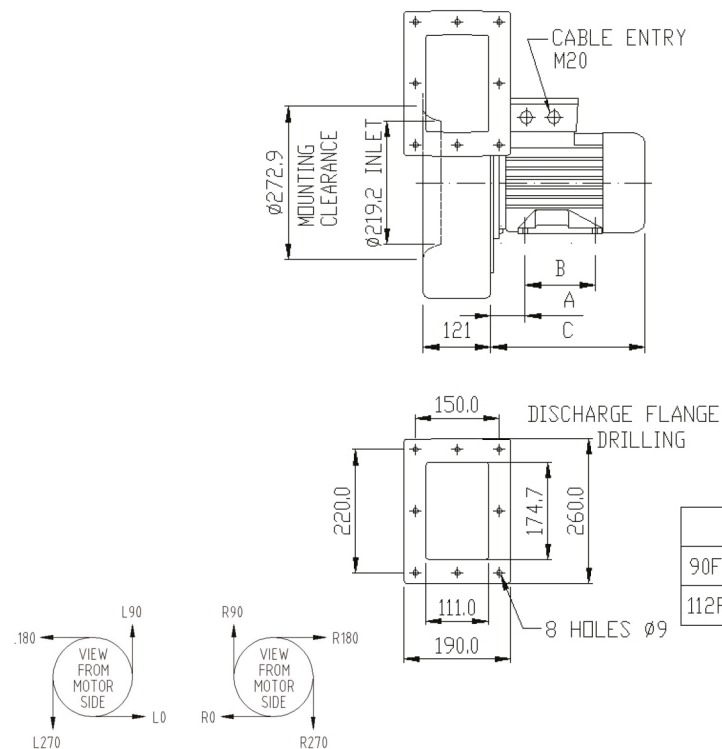

Please note:

- 1 - all drawings measurements are in millimeters (mm)
- 2 - below technical specifications are subject to change
- 3 - Images used may not be representative of the fan supplied

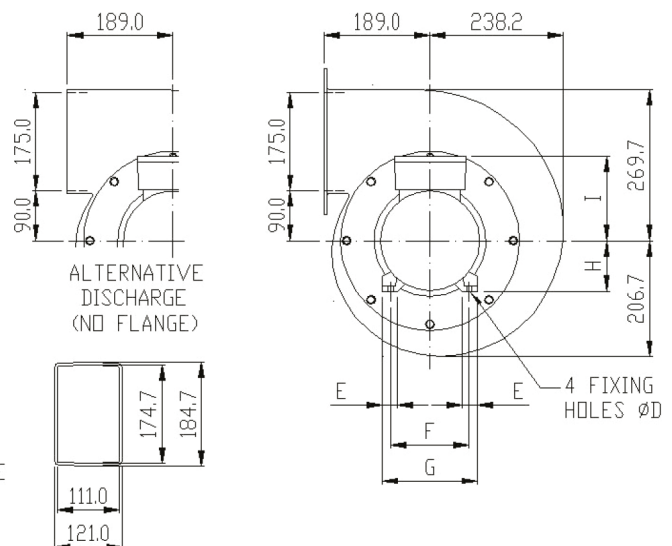

	A	B	C	D	E	F	G	H	I
90F MTR 3KW	61	125	275	9	27	140	170	90	151
112F MTR 4KW	75	140	306	12	41	190	222	112	146

Air Control Industries Ltd

Weycroft Avenue, Millwey Rise Industrial Estate,
Axminster, Devon, EX13 5HU, United Kingdom
Tel: +44(0)1297 529242 Fax: +44(0)1297 529241
Email: sales@aircontrolindustries.com

www.aircontrolindustries.com